

250Ti BQ



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 6 ohm
- Max Recommended Amplifier Power: 400W
- Frequency Response: 30-25 kHz
- Sensitivity: 89 dB SPL*
- Crossover Frequencies: 350 Hz, 1.2 kHz, 5.5 kHz

SYSTEM COMPONENTS:

- Cabinet: C250Ti (Not For Sale)
- Grille: G250Ti
- Low Frequency Transducer: LE14H-1 (14 in.) 360mm Aquaplas Laminate
- Mid Frequency Transducer: 108H (8 in.) 200mm Aquaplas Laminate
- Mid Frequency Transducer: 104H (5 in.) 130mm Filled Polypropylene
- High Frequency Transducer: 035TiA-1 (1 in.) 25mm Pure Titanium Diaphragm
- Crossover Network: N250Ti BQ

PHYSICAL SPECIFICATIONS:


- **Enclosure Dimensions:** (52.0 x 22.5 x 14.25 in. D)
1321mm x 572mm x 362mm D
- **Shipping Weight:** 150 lbs. (68 kg)

WARRANTY INFORMATION:


- Refer to the Warranty Statement packed with each product.

*1 Watt @ 1 Meter

PACKAGE

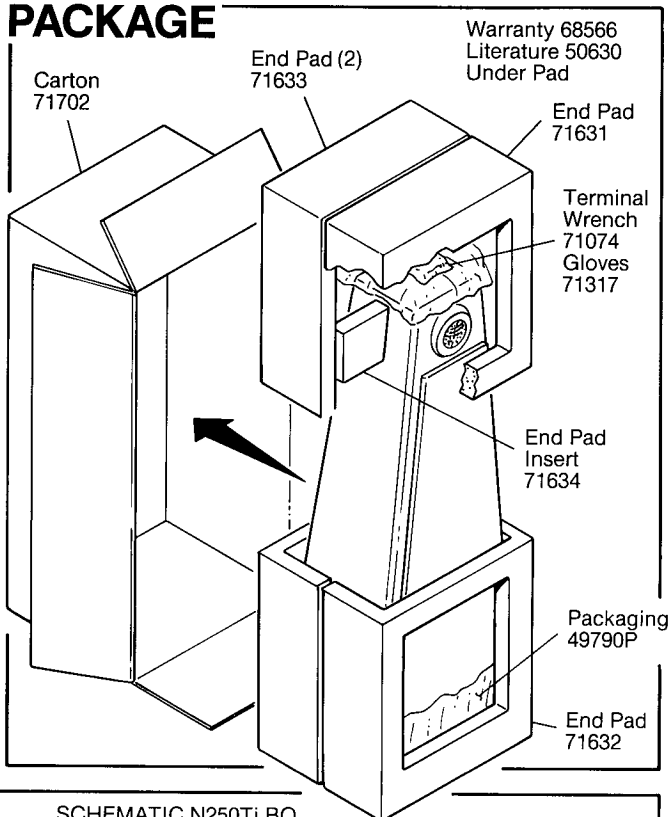

WIRING DIAGRAM

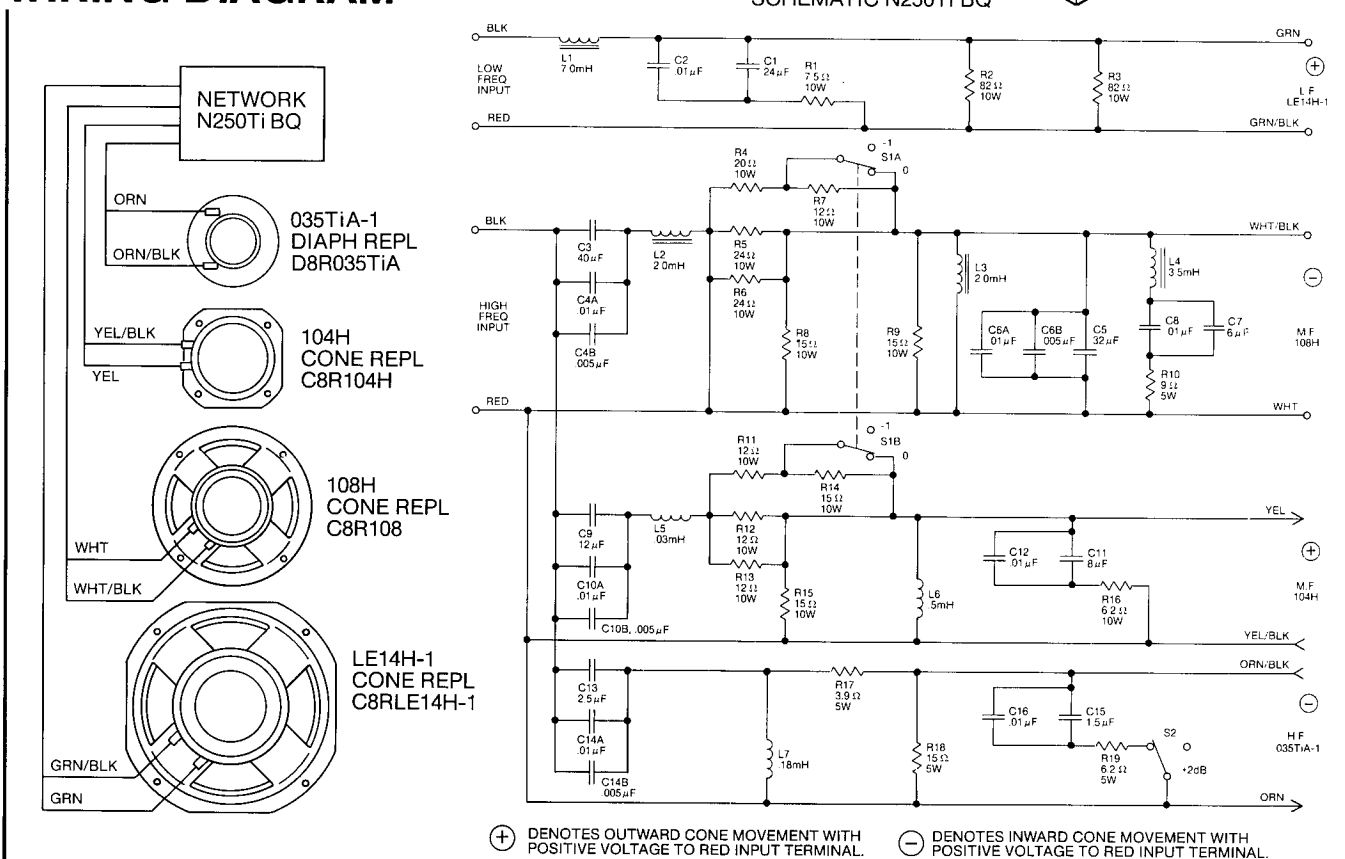


250Ti BQ

DRIVER	TEST VOLTAGE	SWEEP FREQUENCY	GAP GAUGE	DCR MIN-MAX.
035TiA-1	2.83	2KHZ-20KHZ	.031"	3.5-4.2 OHMS
104H	4	7.5KHZ-12KHZ	.044"	3.8-4.6 OHMS
108H	8	20HZ-1.2KHZ	.051"	4.7-5.8 OHMS
LE14H-1	10	20HZ-1.2KHZ	.053"	5.4-6.6 OHMS

250Ti BQ

COMPONENT EXPLODED VIEW

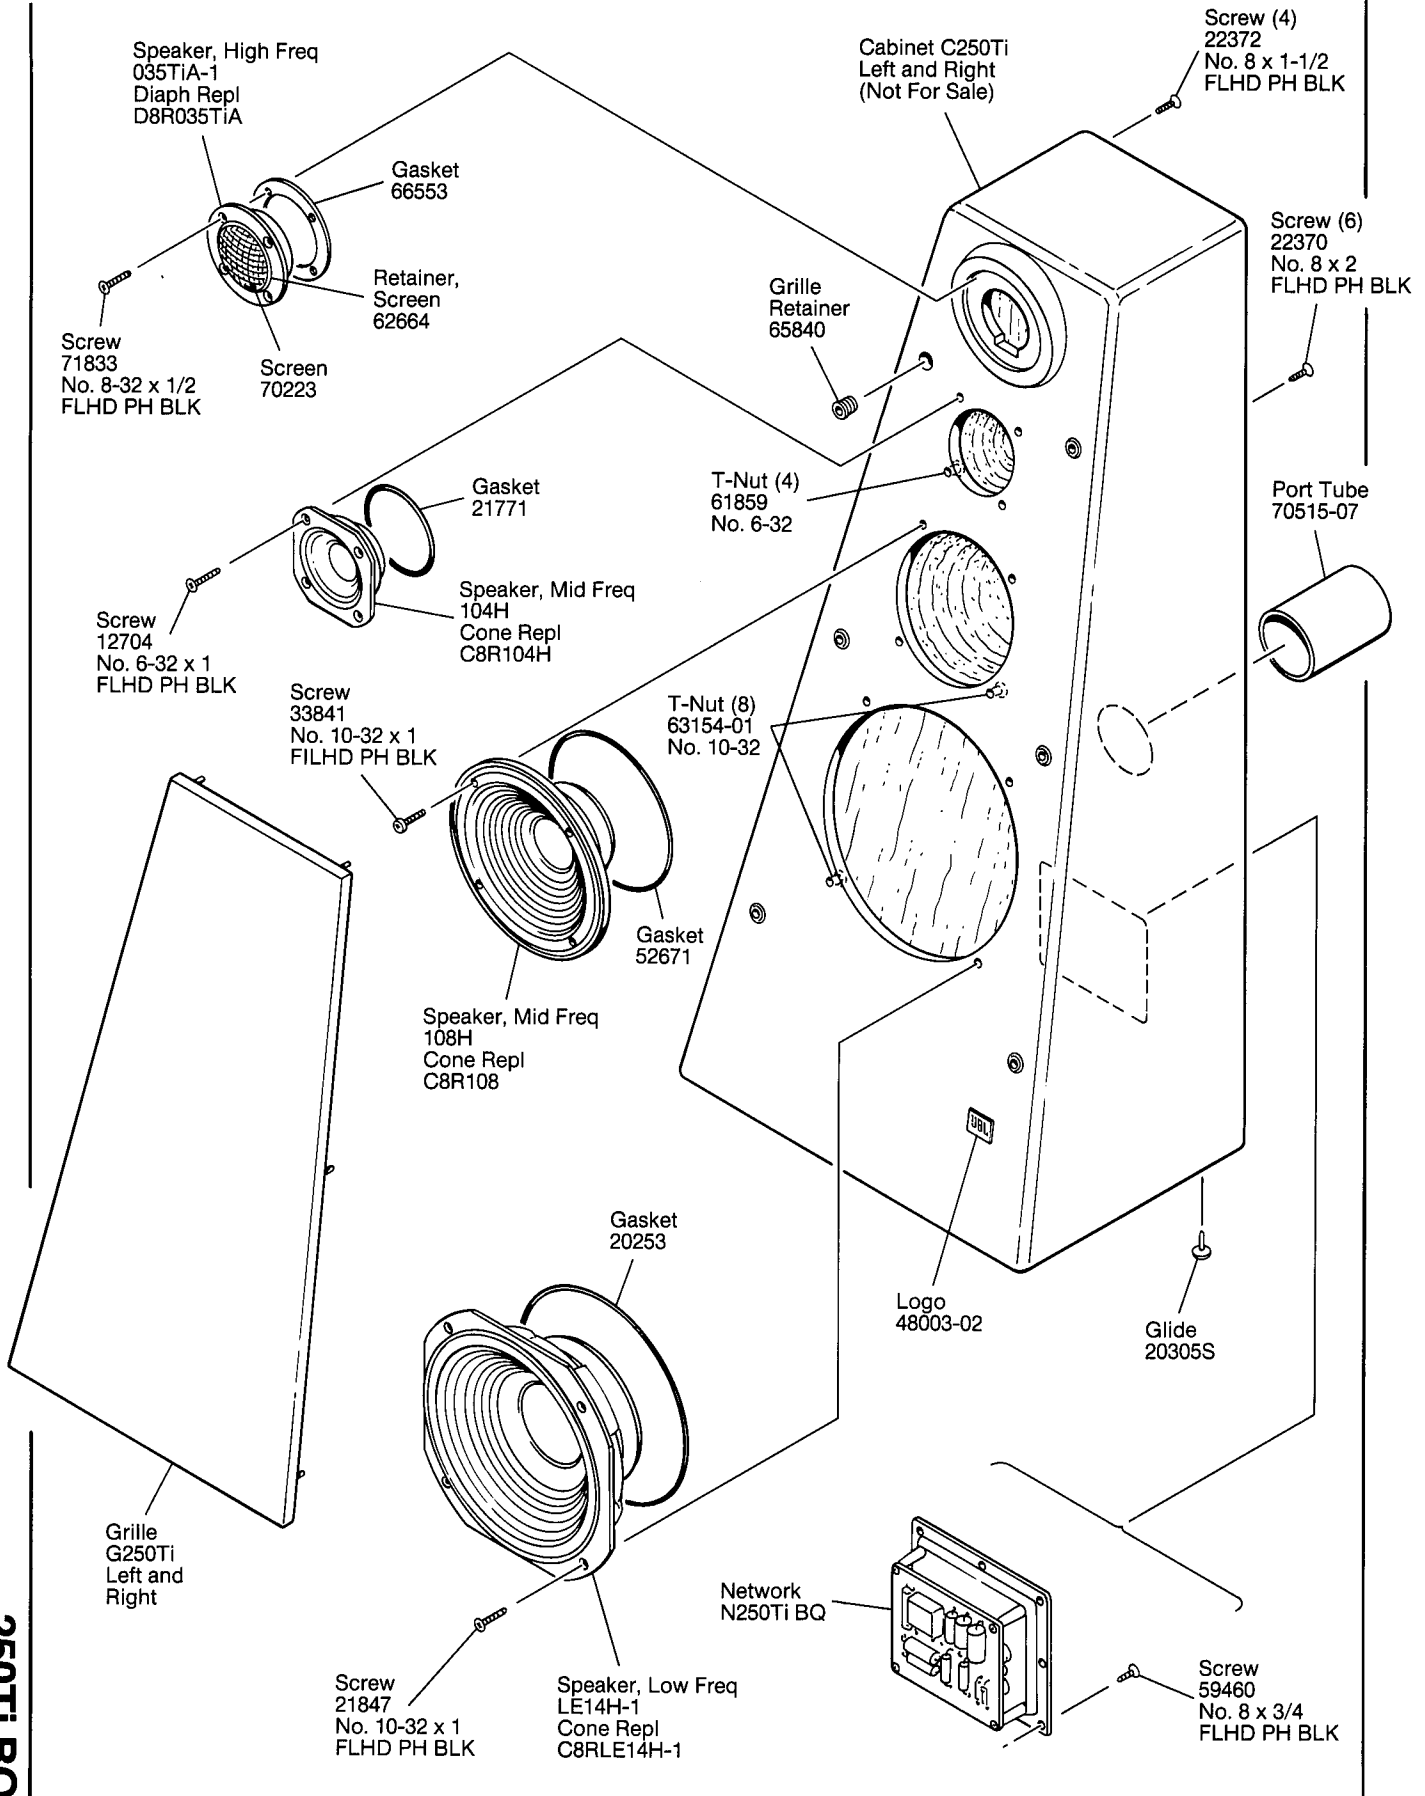

250Ti BQ