


L120/ L120A Aquarius Q

JBL

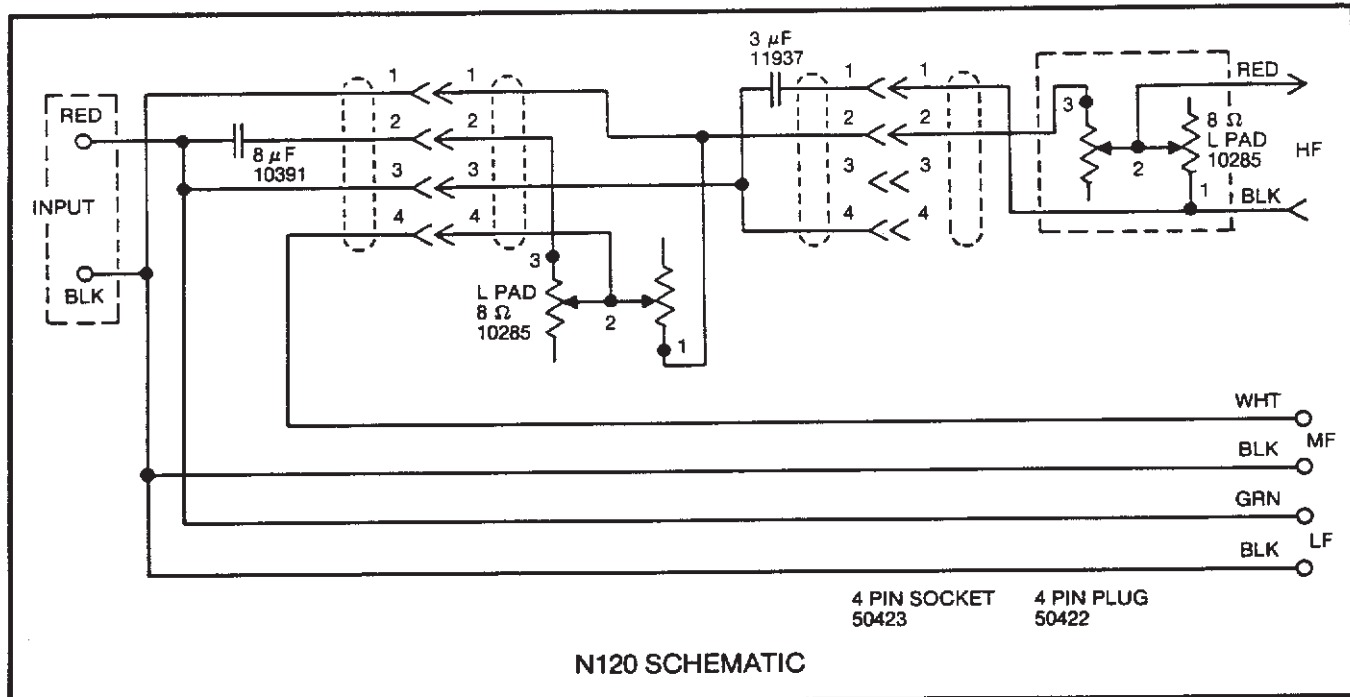

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

Cone Kit:	125A
Nom. Impedance:	C8R127A
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	5
D.C. Resistance Ohms:	30-1200
Gap Gauge:	4.7 min/5.7 max
Notes:	.044"
If Not Serviceable, Replace With:	Dome Inverted
Visual Change:	125HR
Baffle Modification:	Yes
Exact Acoustic Replacement:	No
Replace both units in a stereo pair.	No. Slightly different.
Additional Parts Currently Available*:	
Dome:	50201
Terminal Board:	52348
Mounting Gasket:	52089
Trim Gasket:	52315

MID RANGE DRIVER:

Cone Kit:	LE5-6
Nom. Impedance:	C8RLE510
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	4
D.C. Resistance Ohms:	75-3000
Gap Gauge:	5.6 min/6.8 max
Notes:	.040"
If Not Serviceable, Replace With:	Currently Available.
Can Also Be Replaced With LE5-12.	
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	Yes
Additional Parts Currently Available*:	
Dome:	51868
Terminal Board:	53225
Trim Gasket:	29931

HIGH FREQUENCY DRIVER:

Diaphragm Kit:	LE25-3 (L120)
Nom. Impedance:	LE25-5 (L120A)
Dynamic Test Input V:	D8RLE252 (LE25-3)
Sweep Frequency Hz:	D8RLE254 (LE25-5)
D.C. Resistance Ohms:	8 Ohm
Gap Gauge:	3
Notes:	500-1200
If Not Serviceable, Replace With:	3.7 min/4.2 max
Visual Change:	.029"
Baffle Modification:	Kit includes parts for
Exact Acoustic Replacement:	similar models. Used required parts only.
Replace both units in a stereo pair.	
Additional Parts Currently Available*:	
Trim Ring:	035TiA
Dome:	Yes
	Yes
	No. Slightly different.
	53363 (LE25-3)
	54279 (LE25-5)
	21606

SYSTEM SPECIFICATIONS:

Nom. Impedance:	8 Ohm
Power Capacity:	50 Watts Continuous
Crossover Frequencies:	Program
Sensitivity:	1000 Hz, 8000 Hz
Enclosure Dim:	73dB (1 Watt @ 15 Feet)
Shipping Weight:	43-3/4" x 12" x 12" D
Additional Parts Currently Available*:	111cm x 31cm x 31cm
Binding Posts:	71 lbs. - 32 kg.
Red:	10243
Black:	10244

*Other parts may also be available. Check with JBL for details.