


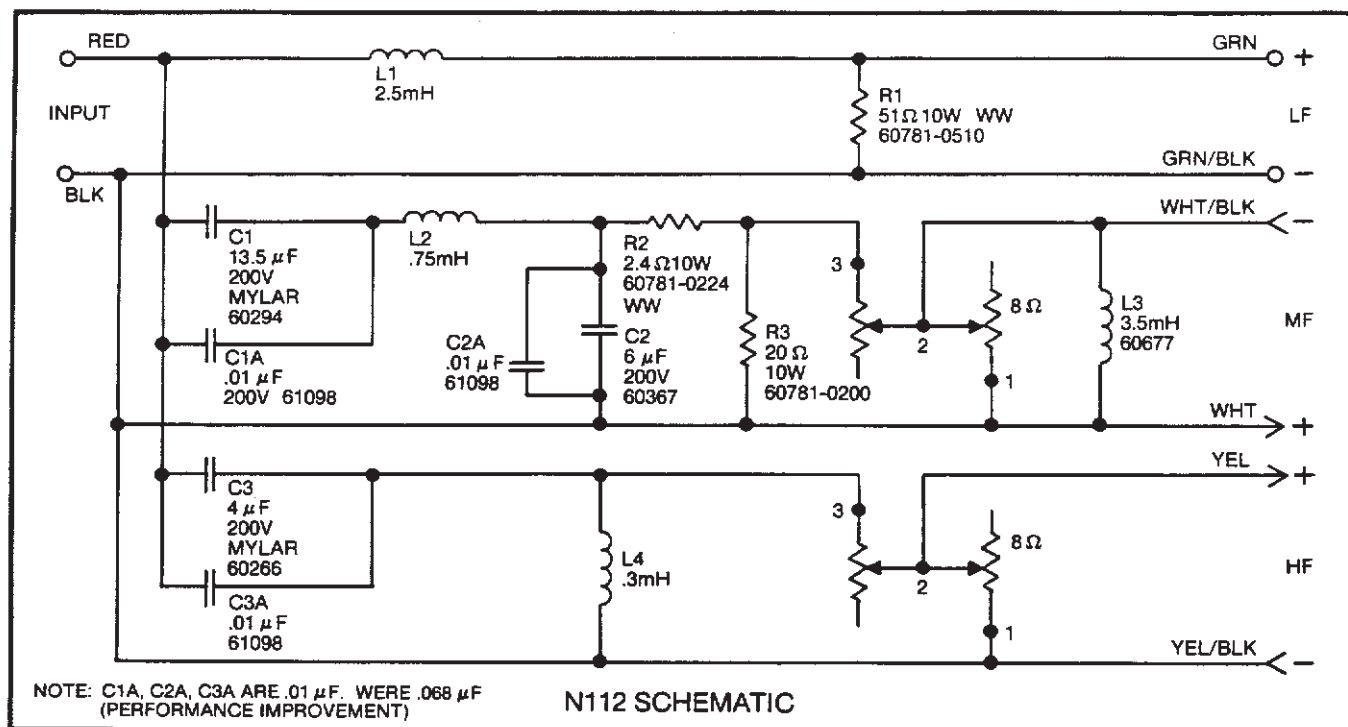

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:	
Cone Kit:	128H
Nom. Impedance:	C8R128H
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	6
D.C. Resistance Ohms:	20-1200
Gap Gauge:	5.1 min/6.3 max
Notes:	.057"
If Not Serviceable, Replace With:	Aquaplas
Visual Change:	128H-1
Baffle Modification:	Yes
Exact Acoustic Replacement:	No
Additional Parts Currently Available*:	Yes
Dome:	31385
Mounting Gasket:	20253
Trim Gasket:	52806

MID RANGE DRIVER:	
Cone Kit:	LE5-12
Nom. Impedance:	C8RLE510
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	4
D.C. Resistance Ohms:	75-3000
Gap Gauge:	4.9 min/6.1 max
Notes:	.040"
If Not Serviceable, Replace With:	Currently Available
Visual Change:	N/A
Baffle Modification:	N/A
Exact Acoustic Replacement:	N/A
Additional Parts Currently Available*:	
Dome:	51686
Terminal Board:	53225

MID RANGE DRIVER (Cont'd)

Mounting Gasket:	21771
Trim Gasket:	29931

HIGH FREQUENCY DRIVER:

Diaphragm Kit:	044
Nom. Impedance:	D8R044
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	2
D.C. Resistance Ohms:	2000-12000
Gap Gauge:	5.4 min/6.6 max
Notes:	.032"
If Not Serviceable, Replace With:	Test With Network
Can Also Be Replaced With:	Currently Available.
Visual Change:	Yes
Baffle Modification:	Yes
Exact Acoustic Replacement:	No. Use as last resort.
Replace both units in a stereo pair.	
Additional Parts Currently Available*:	
Mounting Gasket:	62551
Screen:	60424
Screen Gasket:	60752

SYSTEM SPECIFICATIONS:

Nom. Impedance:	8 Ohm
Max Rec. Amp Power:	300 Watts Per Channel
Crossover Frequencies:	1100 Hz, 3700 Hz
Sensitivity:	89dB (1 Watt @ 1 Meter)
Enclosure Dim:	24-1/2" x 14-1/4" x 13" D
	622mm x 362mm x 333mm
Shipping Weight:	56 lbs. - 25.5 kg.
Additional Parts Currently Available*:	
Binding Posts: Red:	56131
Black:	56130

*Other parts may also be available. Check with JBL for details.